



The 0659N Vandal resistant exit button is suitable for harsh environments – IK07 shock resistance (DIN EN 50102) and panel sealed to IP67.

Switch body and actuator both manufactured from high quality stainless steel. Low profile of 2.5mm (switch protrusion) increases resistance to attack. Actuator travel of 0.8mm provides excellent, reliable and pleasant tactile feedback on input.

0659 provides a momentary contact and incorporates the highly reliable FK4 ultra-miniature micro-switch, both UL & CSA approved. The microswitch has a long life both mechanically and electrically. The switch has 1 x normally open and 1 x normally closed circuit. Double break switching with snap action ensures switching reliability.

Products are supplied flush mount, complete with screws and galvanised steel electrical box. The product is only available in the 1 gang format.

ELECTRICAL SPECIFICATIONS

Mechanism:	Double Pole / Single Throw Snap action coil spring mechanism
Functions:	Change over, NO,NC
Contacts:	Silver
Terminals:	Solder
Temperature Range:	-40°C to +85°C
Mechanical Life:	10 ⁷ cycles min. (impact free actuation)
Protection:	IP40 (enclosure)
Recommended Maximum Electrical Ratings:	
0 – 15Vdc	Load A (max) 2A 50,000 operations
15 – 30Vdc	Load A (max) 2A 50,000 operations
Values shown are recommended max ratings for single circuit switching	

MECHANICAL SPECIFICATIONS

Actuating Travel:	0.8mm
Actuating Force:	3.7N
IK Protection Class:	IK 07

ENVIRONMENTAL / PHYSICAL

Ingress Protection:	IP67mm
Operating Temperature:	-25°C to +85°C
Body / Actuator material:	Stainless Steel


KEY FEATURES

- IP67 Protection
- Impact rating – IK07
- 25mm Knurled actuator / excellent tactile feel
- -25°C to +85°C operating range

OPTIONS

- Custom legends – Laser etch / Engraving
- Surface mount housings
- LED Indicators (12,24,12/24Vdc)
- Custom panels
- Tamper proof fixings

DIMENSIONS (mm)

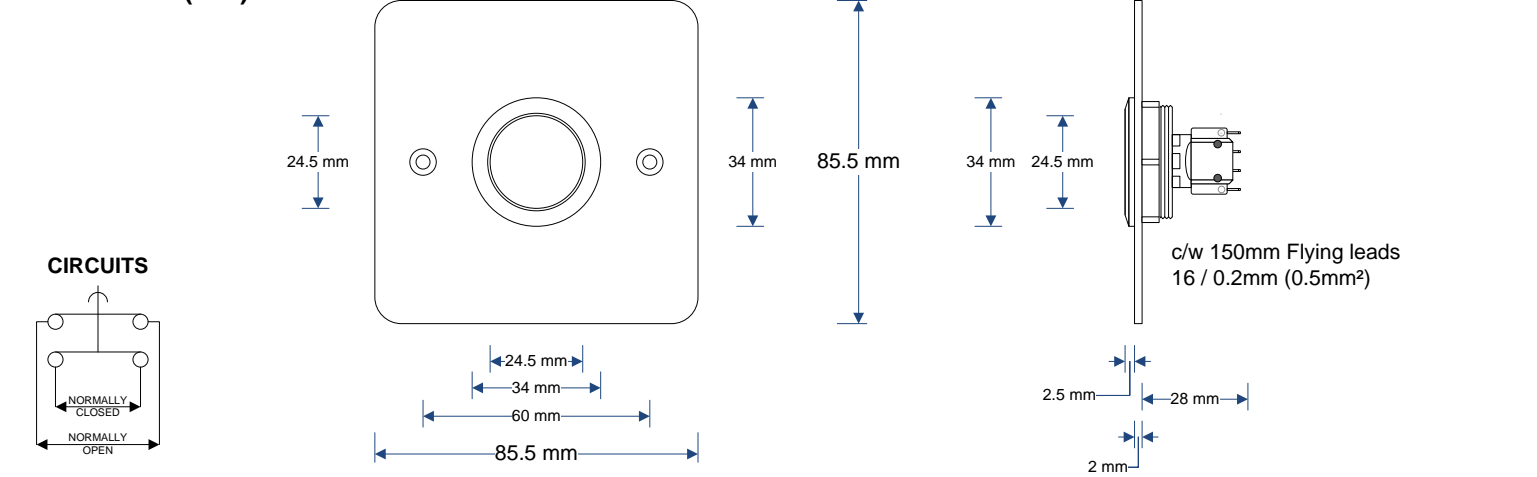

Ordering Information

Product ref:	Description:
3E0659N-1PTE	Vandal resistant exit button, 1 gang, SSS, PRESS TO EXIT
3E0659N-1DR	Vandal resistant exit button, 1 gang, SSS, DOOR RELEASE