


CVK Series video door entry system 1 user (up to 4 monitors), 2 entrance panels

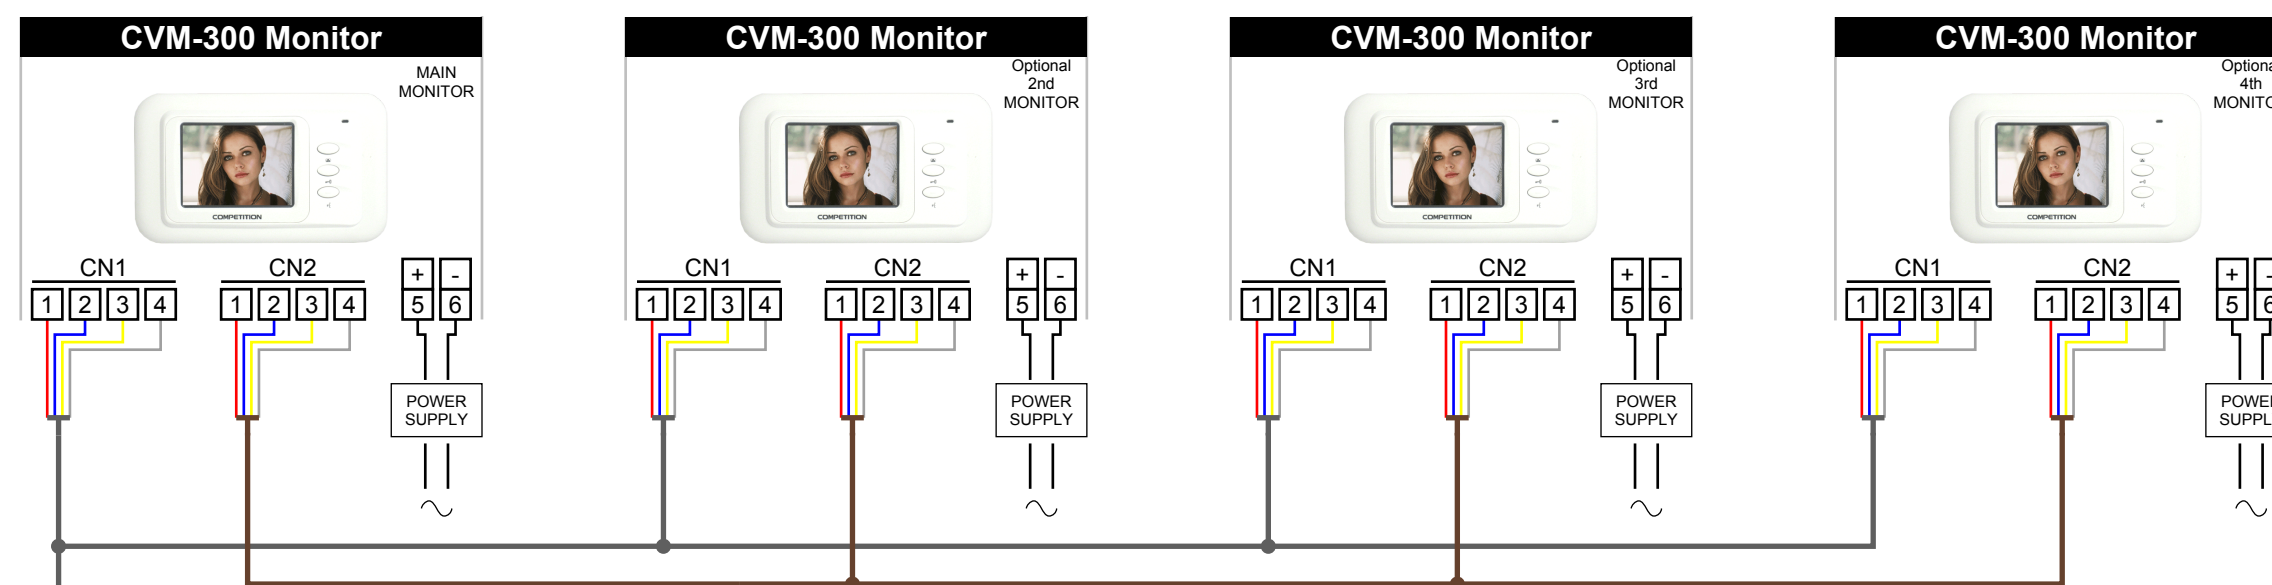

Installation Notes

Entrance Panel(s)

Ignore connections to 2nd entrance panel if not required.
Entrance panels with keypad will require 12V DC power for the keypad.
This power can be taken from the power supply used for the locking device and is supplied to the keypad via the 'C' terminal.

Cable

Distance < 25 metres 0.2mm cross sectional area (eg. CAT5E)
Distance < 50 metres 0.3mm cross sectional area
Distance < 70 metres 0.5mm cross sectional area





Make connections as shown in the diagram to avoid interference.

1	Red	Audio
2	Blue	V-
3	Yellow	V+
4	White	Video

5	Red	PSU	14.5V DC
6	Black	PSU	0V DC

Egress Button


Standard Panels - Connect to 5 & 5
Keypad Panels - Connect to EGR & 0V

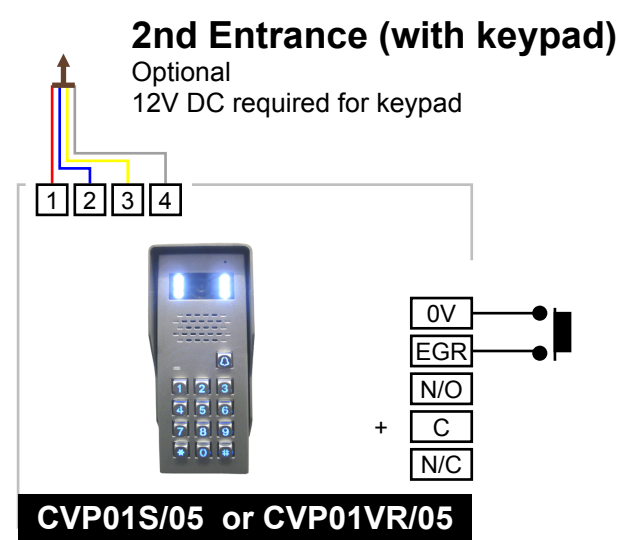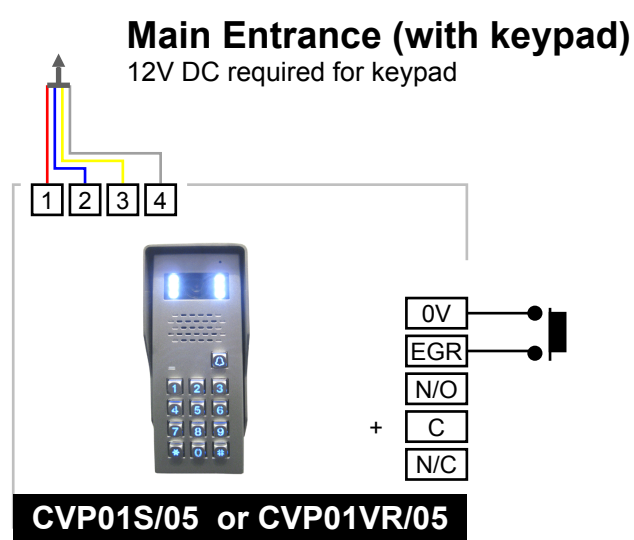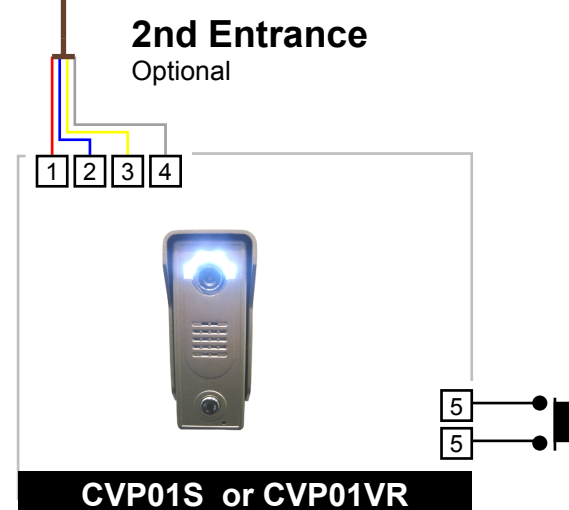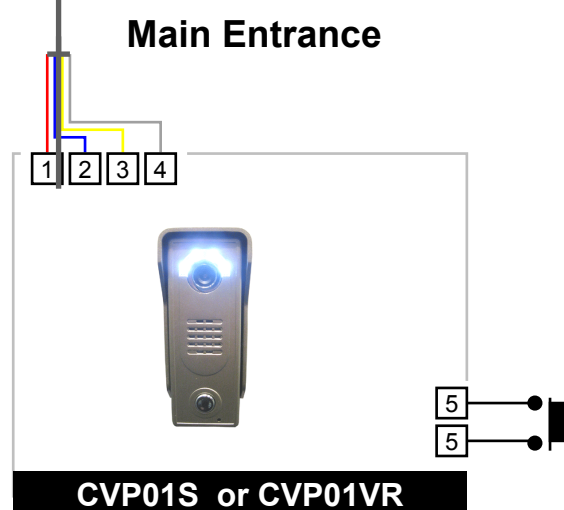


Locking Options

Note : Connections show additional power supply suitable for the lock release used

Volt Free



12V DC Fail Locked

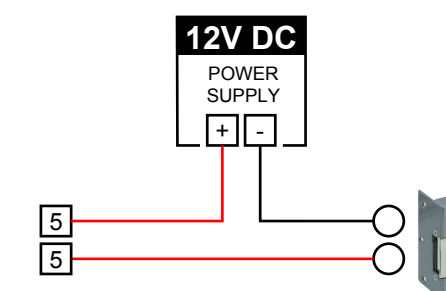

12V DC Fail Un-locked

