


# Micro Magnet

## EM10003 S/F/M

- Operating voltage: 12Vdc  
(24Vdc on request)
- Brushed stainless steel
- Voltage tolerance:  $\pm 15\%$
- Current draw: 300mA at 12Vdc  
(at temperature 20°C)
- Operating temperature:  
-10 to 55°C (14 to 131°F)
- Humidity: 0 to 95% non-condensing
- Lock's surface temperature:  
Current temperature  $\pm 20\%$   
(when power is on)
- Holding force: Up to 300lbs (136kg)
- Weight: 1.5kg (approx)

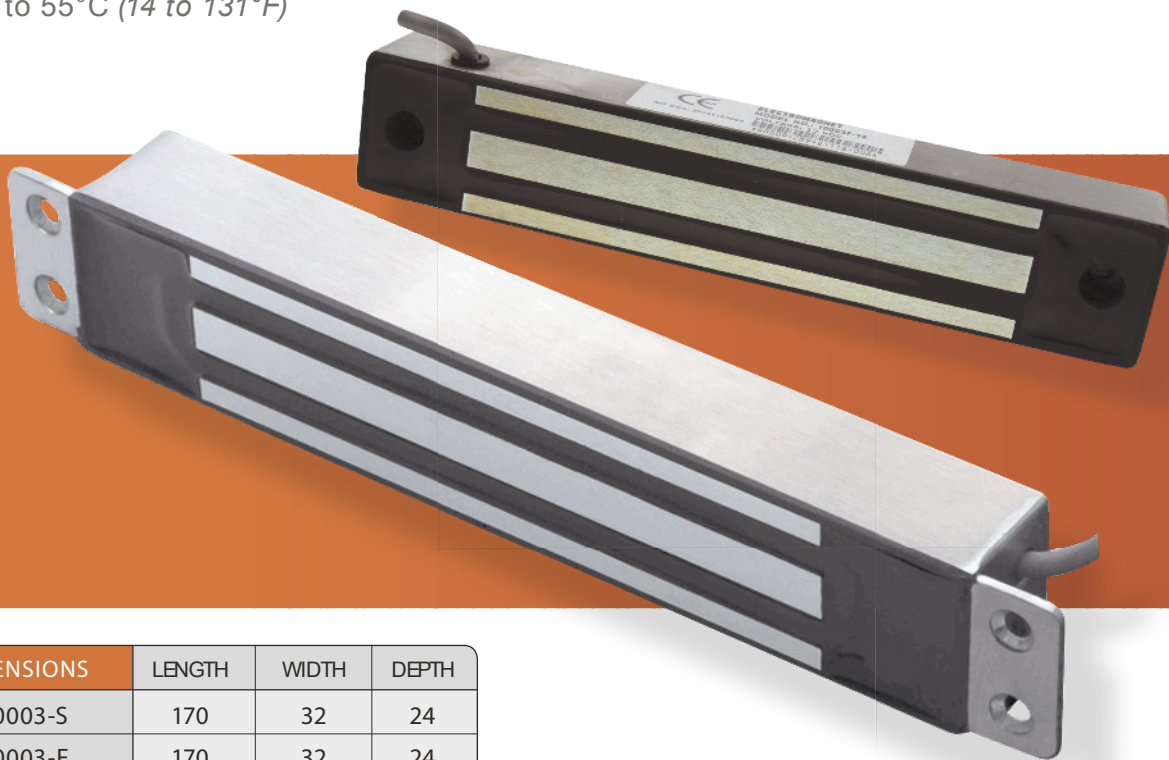

DIMENSIONS	LENGTH	WIDTH	DEPTH
EM10003-S	170	32	24
EM10003-F	170	32	24
EM10003-M	200	32	24

VARIATIONS	
EM10003-S	Standard Fix
EM10003-F	Face Fix
EM10003-M	Mortice Fix

All dimensions in mm

### OPTIONS

#### LZ150 Z&L Kit

- For use with EM10003S

