



magnetic lock

Data Sheet 6S-EM10010EM

Date October 2006

Statement:

GL-1200 gate water-proof Electromagnetic Locks are manufactured under GEM's ISO 9001 Certified Quality Management Program environment back its product quality, performance and commitment to customer satisfaction.

The fail-safe Electromagnetic Lock design with no mechanical parts but magnetic force to secure and release the doors, suitable for use in areas which required access controlled or egress such as exit door.

The Electromagnetic Locks are totally sealed in an epoxy filled stainless steel case for water-resistant and vandal-resistant purpose. A threaded conduit fitting ensures weather resistant protection of the wiring therefore it is ideal for indoor and outdoor applications, even in severe weather.

We offers up to 1200 pounds holding force with 12V DC power input (24V DC or 12/24V DC dual input voltage available by special order), and with the Z-600 bracket (optional) can be installed on in-swinging door. It is the best choice for electronic security industry and system integrators.

Specifications:



- Voltage Tolerance: $\pm 15\%$
- Current Draw: 460mA@12Vdc (at temperature 20°C)
(Further notice for diverse input voltage on special order requirement)
- Magnetic bond sensor monitor output (GL-1200R)
(SPDT rated 0.25A@12V DC), remotely monitors the door lock or unlock status. (N.C. Output=Door opened; N.O. Output=Door closed)
- Operating Temperature: -10~55°C (-14~131°F)
- Humidity: 0~85% non-condensing
- Lock's surface Temperature (when the power is on):
■ Current temperature +20°C
- Holding Force: Upto 1200 lbs (545 Kg)
- Dimensions:
Magnet: (L) 202, (W) 62, (D) 40 mm
Armature Plate: (L) 185, (W) 62, (D) 16 mm
- Special Finishes for magnet and armature plate: Zinc
- Epoxy Potting Compound: E87252 (S), UL94V-0
- Weight (Approx.): 4.8 Kg

Warranty:

GEM Electromagnetic Locks are warranted against defects in material and workmanship while used in normal service for a period of 5 years from the date of sale to the original customer

Disclaimer:

The information and specifications printed in this manual are current at the time of publication. The GEM policy is one of continual development and improvement; therefore GEM reserves the right to change specifications without notice.

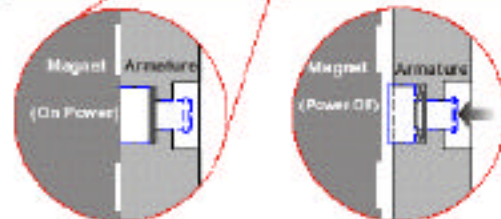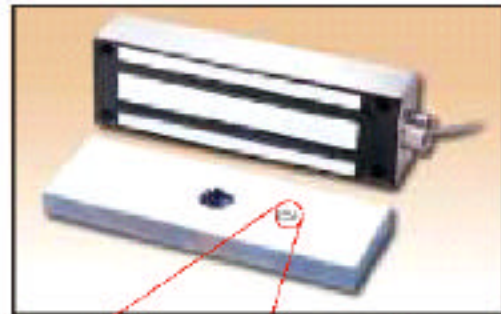

Unique Anti-Residual design

When there is no power, there will be no holding force, and the push-off button will pop out immediately, to release the Lock and the Armature. Plate for nonresidual magnetism.

Optional Brackets:

Identify the door swinging direction and inspect the door frame header to determine if brackets is required.

With Z-bracket for in-swinging doors

